




## RAYCHEM

### 2SC-LTC

#### End Termination Kit Installation Instructions

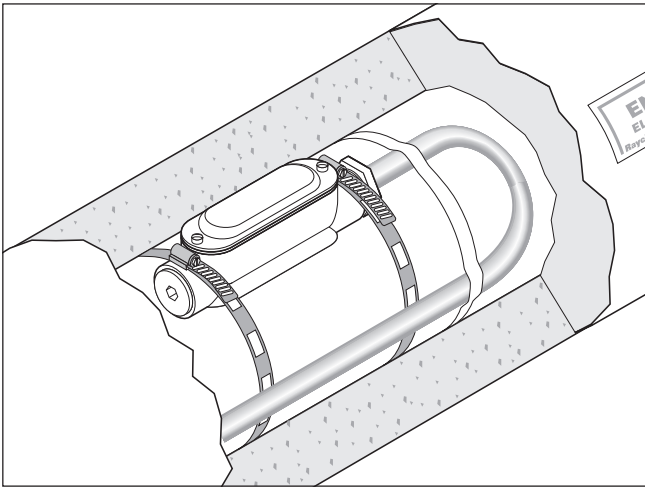

#### DESCRIPTION

The nVent RAYCHEM 2SC-LTC is a NEMA 4 rated end termination kit designed for use with RAYCHEM 2SC60, 70, 80 (-CT), 2SC/H60, 70, 80 (-CT) and 2SC/F60, 70, 80 (-CR) series heating cables in hazardous locations.

This kit may be installed at temperatures as low as  $-40^{\circ}\text{F}$  ( $-40^{\circ}\text{C}$ ). For easier installation, store above freezing until just before installation.

For technical support, call nVent at (800) 545-6258.

#### TOOLS REQUIRED

- Utility knife
  - 3/8 in. hex key
  - Slotted screwdriver
  - Wire strippers
  - Solder tool or torch (with small tip)
  - Thomas & Betts TBM5S crimp tool or equivalent (P/N P00000585)
  - Thomas & Betts WT2000 crimp tool or equivalent (P/N 273435-000)
  - Diagonal cutters
  - Disposable towel or rag
  - Adjustable wrench
- Crimp tools can be ordered from nVent.

#### ADDITIONAL MATERIALS REQUIRED

- Glass cloth tape:
  - GT-66 for installation temperature above  $40^{\circ}\text{F}$  ( $4^{\circ}\text{C}$ )
  - GS-54 for installation temperature above  $-40^{\circ}\text{F}$  ( $-40^{\circ}\text{C}$ )

#### APPROVALS

##### Hazardous Locations



Class I, Div. 2, Groups A, B, C, D  
Class II, Div. 2, Groups F, G  
Class III



Ex e II T <sup>(1)</sup>

<sup>(1)</sup> for T-Rating, see design documentation

#### ⚠ WARNING:

This component is an electrical device that must be installed correctly to ensure proper operation and to prevent shock or fire. Read these important warnings and carefully follow all of the installation instructions.

- To minimize the danger of fire from sustained electrical arcing if the heating cable is damaged or improperly installed, and to comply with the requirements of nVent, agency certifications, and national electrical codes, ground-fault equipment protection must be used. Arcing may not be stopped by conventional circuit breakers.
- Component approvals and performance are based on the use of nVent-specified parts only. Do not use substitute parts or vinyl electrical tape.

- Damaged conductors can overheat or short. Do not break conductor wire strands when scoring the jacket or removing insulation.
- Keep components and heating cable ends dry before and during installation.
- Use only fire-resistant insulation materials, such as fiberglass wrap or flame-retardant foam.
- Solder tools or torches can cause fire or explosion in hazardous areas. Be sure there are no flammable materials or vapors in the area before using these tools.
- Wrap exposed conductors with supplied tape strips to prevent shorts.

#### ⚠ CAUTION:

**HEALTH HAZARD:** Hot solder can burn eyes and skin. Fumes during soldering are irritating to eyes and may cause headache and respiratory system irritation or damage. Prolonged or repeated exposure to rosin flux fumes during soldering may result in allergic reaction in a sensitive person, resulting in asthma symptoms. Consult MSDS VEN0043 for further information.


Silicone rubber compound, Part A and Part B, may generate flammable and explosive hydrogen gas if it comes in contact with an acidic, basic or oxidizing material. Personal contact with the silicone rubber compound may cause slight eye or skin irritation. Consult MSDS VEN0030 and VEN0031 for further information.

CHEMTREC 24-hour emergency  
telephone: (800) 424-9300

Non-emergency health and safety information:  
(800) 545-6258.

## KIT CONTENTS


Item	Qty	Description
A	1	Box with cover, gasket, and 2 screws
B	1	Bushing
C	1	Grommet
D	1	Plug
E	8	Tape strips (6 required, 2 extra)
F	1	Pipe clamp banding kit
G	1	ETL-END Seal label
H	1	Cable lubricant
I	1	Bolt, lock washer and nut
J	1	Coil of Kester® 48 core LF solder for nickel
K	1	Thomas & Betts # C10-14 ring terminal
L	2	Silver parallel splices (spare included)
M	2	Blue compression joints (spare included)
N	2	Brown compression joints (spare included)
O	1	KE 1204 silicone rubber potting compound Part B
P	1	KE 1204 silicone rubber potting compound Part A
Q	2	Stir sticks
R	2	Material Safety Data Sheets (not shown)

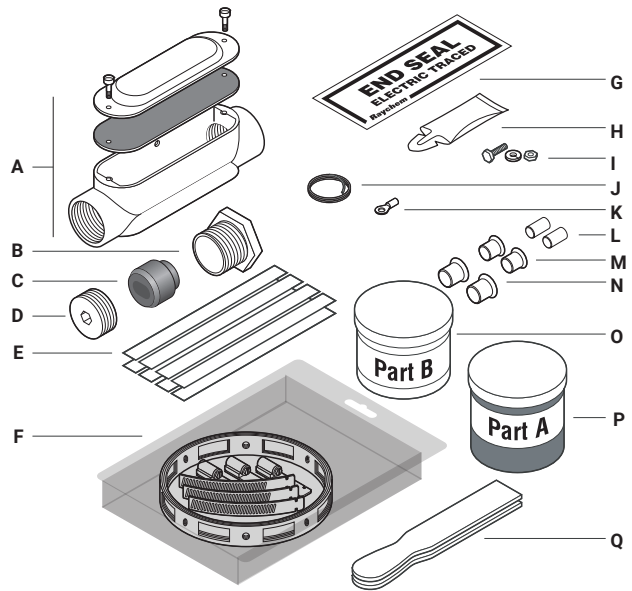

## Heating Cable Construction

### Heating cable types


- 2SC60, 70 and 80 (-CT)
- 2SC/H60, 70 and 80 (-CT)
- 2SC/F60, 70 and 80 (-CR)

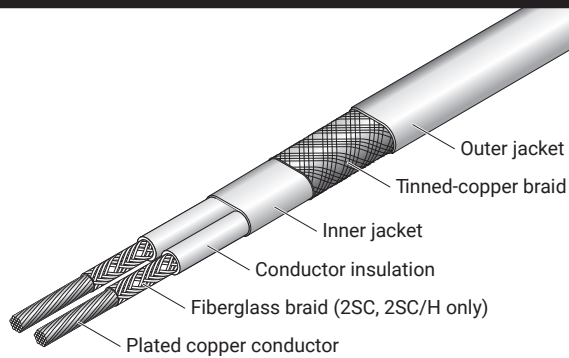

1


- Allow approximately 18 inches (46 cm) of heating cable for this installation.

18 in  
(46 cm)

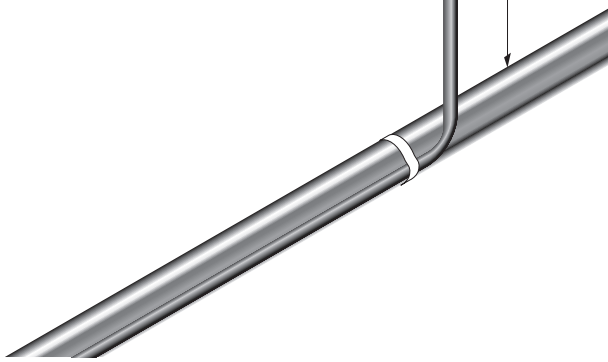


2

Hex side of bushing  
Narrow end of grommet

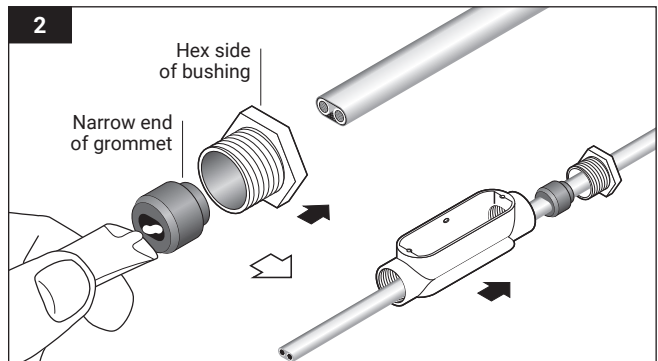


- For easier installation, apply cable lubricant inside grommet from each end.
- Slide the bushing and grommet onto heating cable in order and orientation shown.
- Position the box as shown.

3

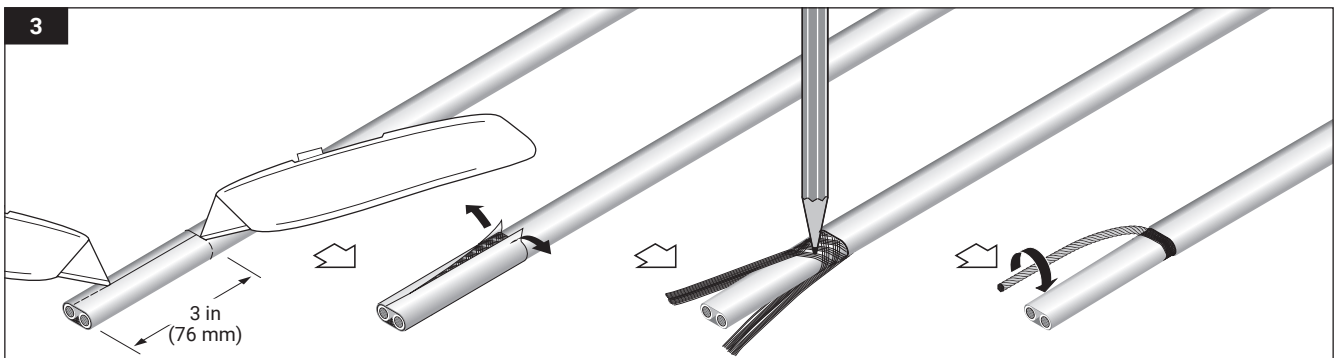

- Lightly score outer jacket around and down as shown.
- Bend heating cable to break jacket at score, then peel off jacket.
- Use a pointed object to separate the braid from the heating cable.
- Pull braid to the same side as small hole in side of box.
- Twist the braid to make a pigtail.


4

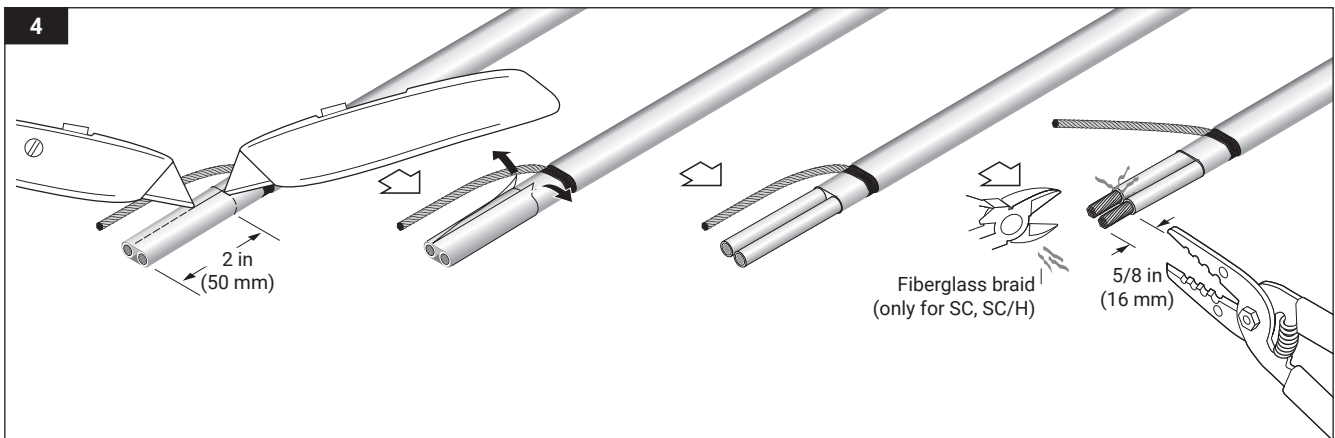

- Lightly score inner jacket around and down as shown.
- Bend heating cable to break jacket at score then peel off jacket.
- Remove 5/8-inch (16 mm) of the insulation and fiberglass braid to expose the bare conductors.

5


- Use the Thomas and Betts WT2000 crimp tool to crimp the ring terminal to the braid.

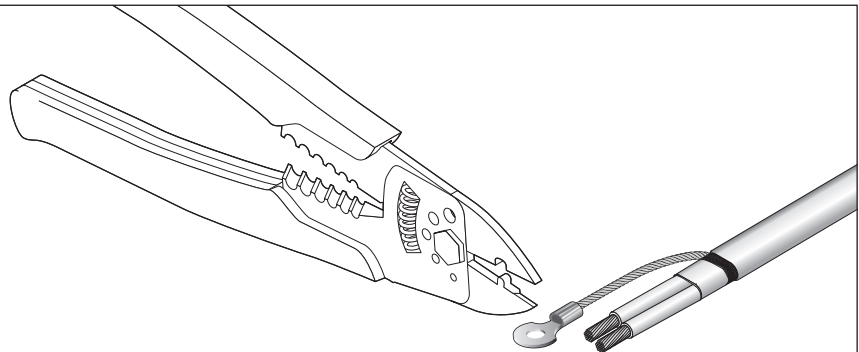

6

**⚠ WARNING: Using the wrong splice can cause overheating. Use only the splice specified for the cable type.**

- Use the appropriate crimp tool to connect the two heating cable conductors (see table).
- When using the WT2000 crimp tool crimp the splice twice.

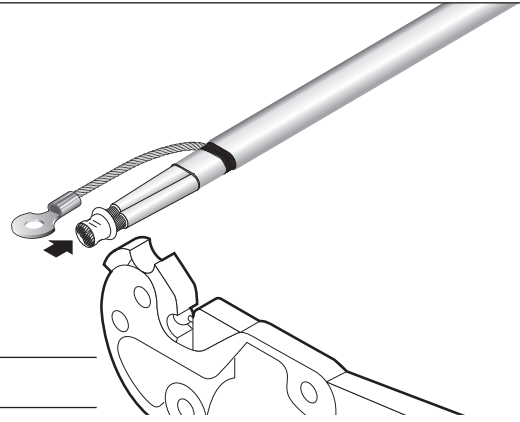


Thomas & Betts (T&B)

Heating cable <sup>(1)</sup>	Heating cable conductor size	Splice Catalog no.	Splice color	Crimp tool	Crimp tool die
2SC60-CT	12 AWG	C10-PS-D	Silver	WT2000	Non-insul.
2SC70-CT	10 AWG	54610	Blue	TBM5S	Blue
2SC80-CT	8 AWG	54620	Brown	TBM5S	Brown

<sup>(1)</sup> The above table is also applicable for 2SC/H60, 70, 80 (-CT) and 2SC/F60, 70, 80 (-CR) heating cables. For replacement crimps, call nVent at (800) 545-6258.

7

**⚠ WARNING: Fire and Health Hazard**  
**Soldering tools or minitorches can cause fire or explosion in hazardous areas. Be sure there are no flammable materials or vapors in the area before using these tools. Follow all site safety guidelines when working in hazardous areas.**  
**Refer to solder material safety data sheet packaged with kit.**  
**Do not overheat or char the conductor insulation. Inhalation of fumes can cause polymer fume fever, flu-like symptoms, irritation and difficulty breathing.**

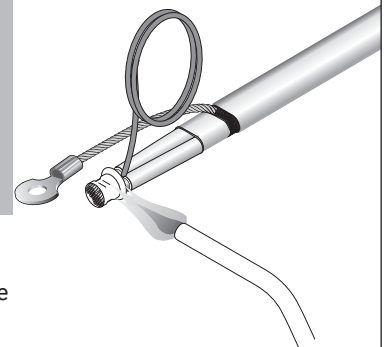


- Use only solder provided with kit. Only Kester 48 core LF has been qualified with SC kits.
- Heat splice using a soldering tool, or propane or MAPP gas torch. Note: MAPP gas may be required if the connections are being soldered at temperatures below -4°F (-20°C). Heat the center of the splice until it is hot enough to melt the solder placed at both ends.

**Allow the connection to cool before proceeding to the next step.**


8

**IMPORTANT:** To ensure proper electrical insulation, use the specified high temperature Teflon® tape provided with the kit. Do not use common vinyl tape that does not have adequate temperature rating.

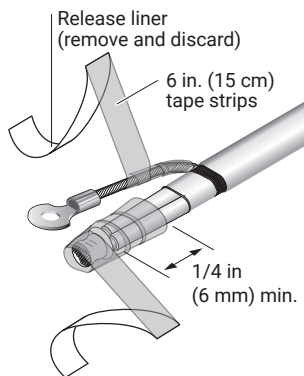


- Wrap connection with four strips of tape, covering splice and 1/4-inch (6 mm) of conductor insulation (approximately three overlapped layers).
- Wrap the braid with two tape strips.

9

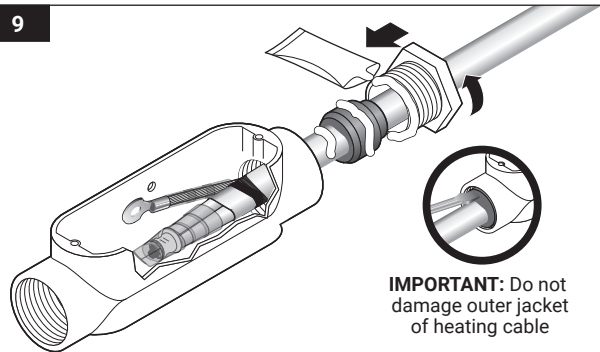

- Center connection in the box.
- Apply cable lubricant to the outside surface of grommet, cable and end of bushing as shown.
- Slide grommet into end of box and seat to the bottom of the threaded section using a screwdriver or blunt instrument.
- Slide bushing into end of box. Screw into threaded section and tighten with a wrench.


10

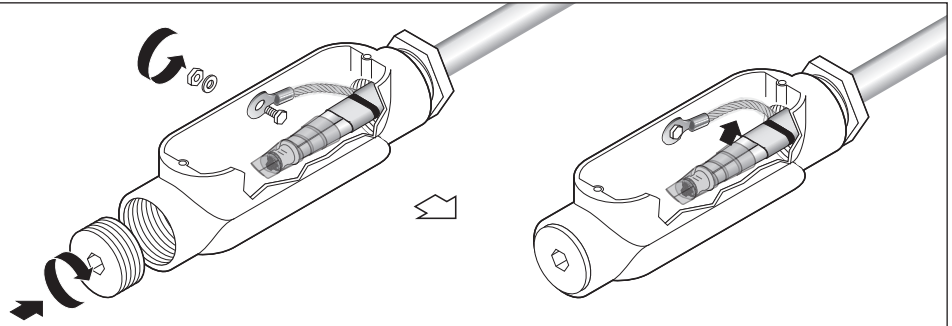

- Position lock washer and nut on outside of box. Fasten braid ring terminal using bolt.
- Install the plug.
- Push braid wire as far away from connection as possible.
- Position taped connection so it is centered and not touching the surface of enclosure, braid wire or ground screw.
- All braid wires must be fully contained within box. Reposition connection if necessary.


11

**⚠ WARNING: Health Hazard**  
Refer to silicone rubber material safety data sheet packaged with kit.

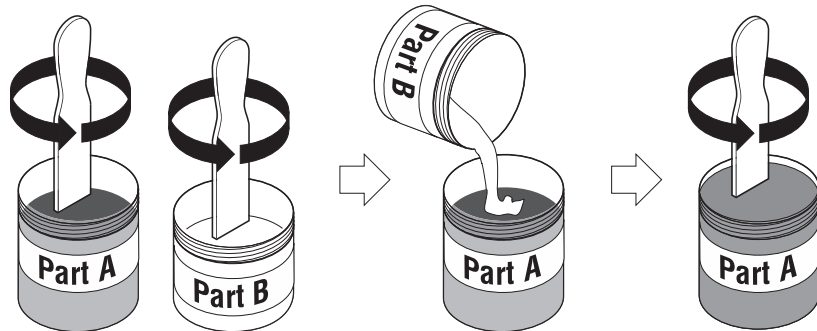


- Open the two containers: one labeled Part A, and the other Part B.
- Use separate wooden sticks to mix the contents of each container until smooth and homogeneous.
- Pour the contents of the container labeled Part B into the container labeled Part A and mix thoroughly until the color is uniform.

12

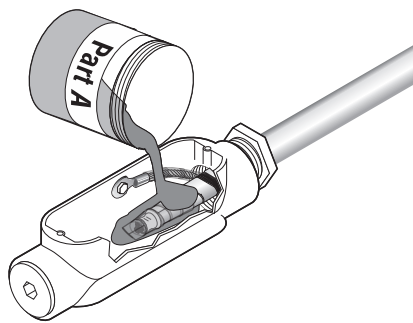

- Pour the potting compound mixture into the box.
- Potting compound must fill the box and cover all connections.

13

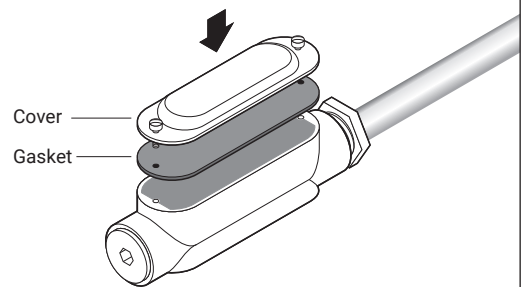


- Secure the cover and gasket using the two screws provided.

**WARNING: Fire and Shock Hazard**

To prevent cable damage, do not position pipe banding over the heating cable.

Ensure the cable does not cross over itself to prevent damage to the jacket and shorting.

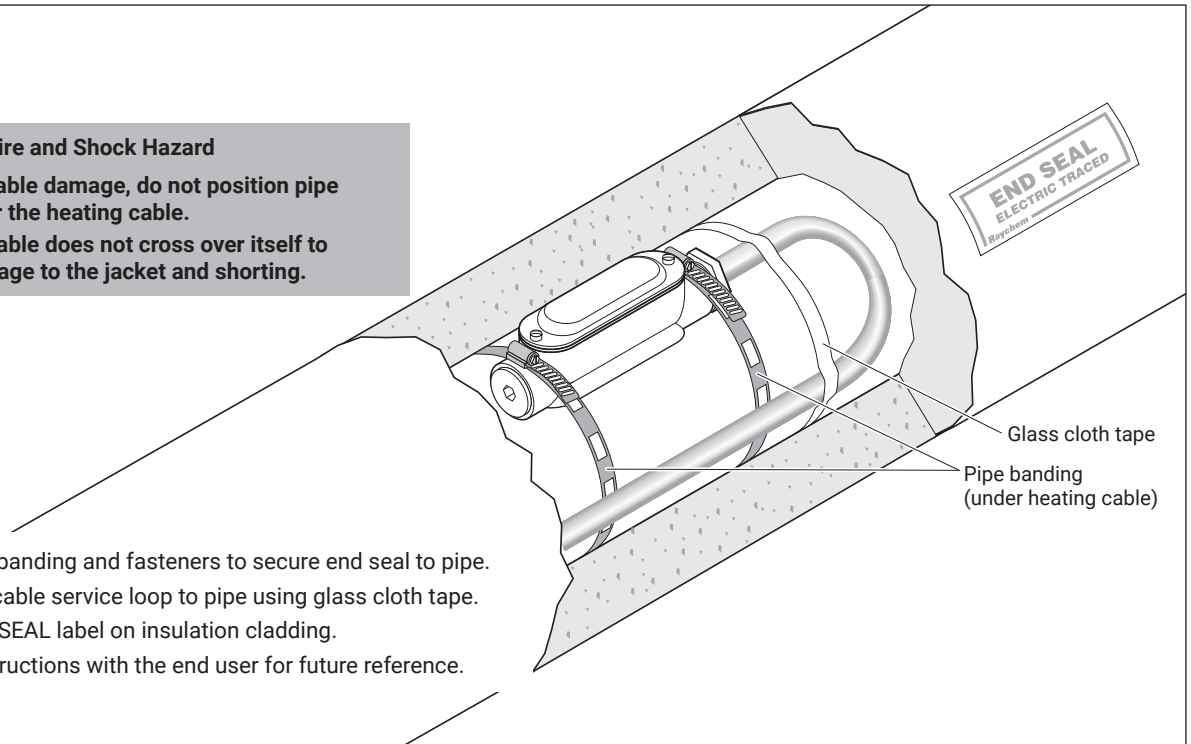

- Use pipe clamp banding and fasteners to secure end seal to pipe.
- Secure heating cable service loop to pipe using glass cloth tape.
- Install ETL-END-SEAL label on insulation cladding.
- Leave these instructions with the end user for future reference.

**North America**

Tel +1.800.545.6258  
 Fax +1.800.527.5703  
[thermal.info@nvent.com](mailto:thermal.info@nvent.com)

**Europe, Middle East, Africa**

Tel +32.16.213.511  
 Fax +32.16.213.604  
[thermal.info@nvent.com](mailto:thermal.info@nvent.com)

**Asia Pacific**

Tel +86.21.2412.1688  
 Fax +86.21.5426.3167  
[cn.thermal.info@nvent.com](mailto:cn.thermal.info@nvent.com)

**Latin America**

Tel +1.713.868.4800  
 Fax +1.713.868.2333  
[thermal.info@nvent.com](mailto:thermal.info@nvent.com)



[nVent.com](http://nVent.com)